







Features

- High air pressure, long distance air supply.
- Low noise & Stable operation.
- Pure copper motor, ball bearing.
- Low power consumption.

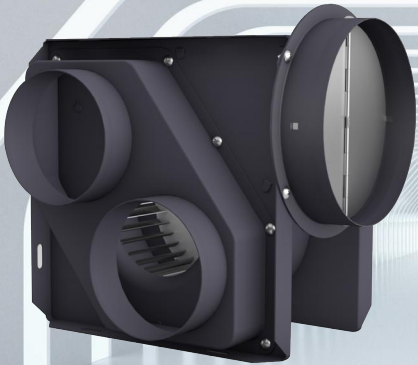

High performance in-line extractor with ultra quiet turbine fan designed for ducted ventilation suitable for both residential and commercial use.


Performance Curve



Product Specification

unit: mm

| Model          | L   | L1  | L2    | ΦE  | W   | W1    | H   | H1  | ΦI  |
|----------------|-----|-----|-------|-----|-----|-------|-----|-----|-----|
| DPT10-11(1T2)  | 246 | 181 | 122.5 | 75  | 210 | 111.5 | 194 | 139 | 98  |
| DPT10-11F(1T2) | 246 | 181 | 122.5 | 75  | 210 | 111.5 | 194 | 139 | 98  |
| DPT10-34(1T2)  | 306 | 230 | 122.5 | 100 | 247 | 141.5 | 259 | 176 | 150 |



| Model          | Voltage   | Speed | Power (W) | Air Volume (m³/h) | Static Pressure (Pa) | Noise (dB) | Duct Diameter Φ (mm) |
|----------------|-----------|-------|-----------|-------------------|----------------------|------------|----------------------|
| DPT10-11(1T2)  | 220V-50Hz | H/L   | 28/23     | 160/130           | 75/65                | 38/35      | 100                  |
| DPT10-11F(1T2) | 220V-50Hz | H/L   | 30/26     | 200/180           | 200/180              | 43/38      | 100                  |
| DPT15-34(1T2)  | 220V-50Hz | H/L   | 42/34     | 400/320           | 155/145              | 52/49      | 150                  |

